
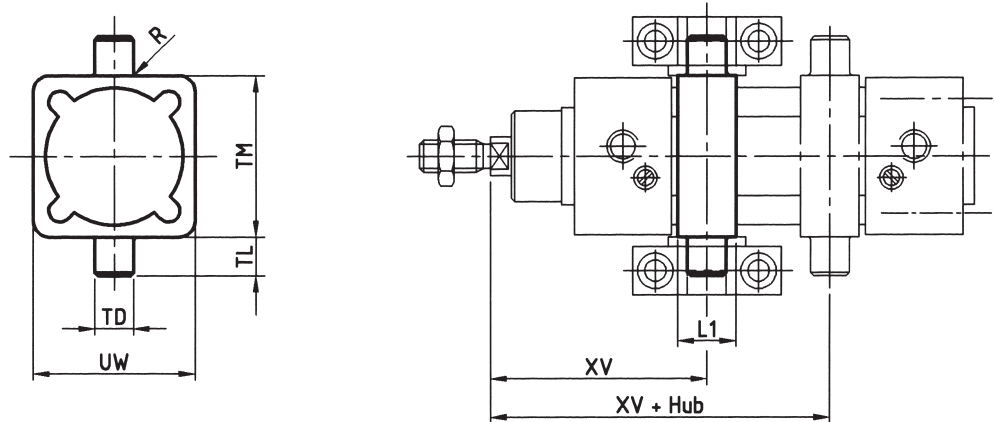


Anbauteil Schwenkzapfenbefestigung – MT4P

(nur in Verbindung mit Zylinderprofil Typ DIP/DIPM lieferbar)

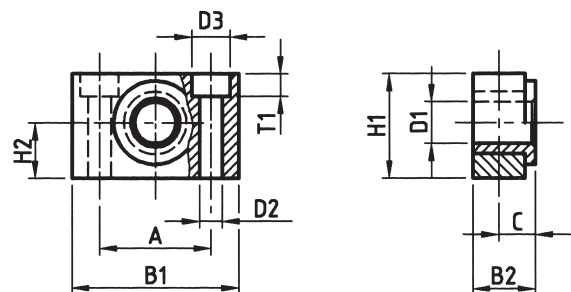

Typ	Kolben-Ø	L1	TD _{e9}	TL _{h14}	TM _{h14}	UW	R _{max.}	XV	Gewicht kg
MT4 P-032	32mm	20	12	12	50	65	1,0	73,0	0,13
MT4 P-040	40mm	25	16	16	63	75	1,5	82,5	0,24
MT4 P-050	50mm	25	16	16	73	95	1,6	90,0	0,32
MT4 P-063	63mm	30	20	20	90	105	1,6	97,5	0,60
MT4 P-080	80mm	30	20	20	108	130	1,6	110,0	0,92
MT4 P-100	100mm	35	25	25	131	145	2,0	120,0	1,50

Anbauteil Lagerbock für Schwenkzapfenbefestigung – AT4


Typ	Kolben-Ø	A ^{+0,2} _{-0,2}	B1	B2	C	D1 ^{F7}	D2 ^{H13}	D3	H1	H2 ^{+0,1} _{-0,1}	T1	Gewicht kg
AT4-032	32mm	32	46	18,0	10,5	12	6,6	11	30	15	7	0,10
AT4-040	40mm	36	55	21,0	12,0	16	9,0	15	36	18	9	0,15
AT4-050	50mm	36	55	21,0	12,0	16	9,0	15	36	18	9	0,15
AT4-063	63mm	42	65	23,0	13,0	20	11,0	18	40	20	11	0,23
AT4-080	80mm	42	65	23,0	13,0	20	11,0	18	40	20	11	0,23
AT4-100	100mm	50	75	28,5	16,0	25	14,0	20	50	25	13	0,44

Lieferumfang 1 Paar



Anbauteil Schwenkzapfenbefestigung – MT4


Befestigung der Zugstange wahlweise geschraubt Typ A oder geklemmt Typ B

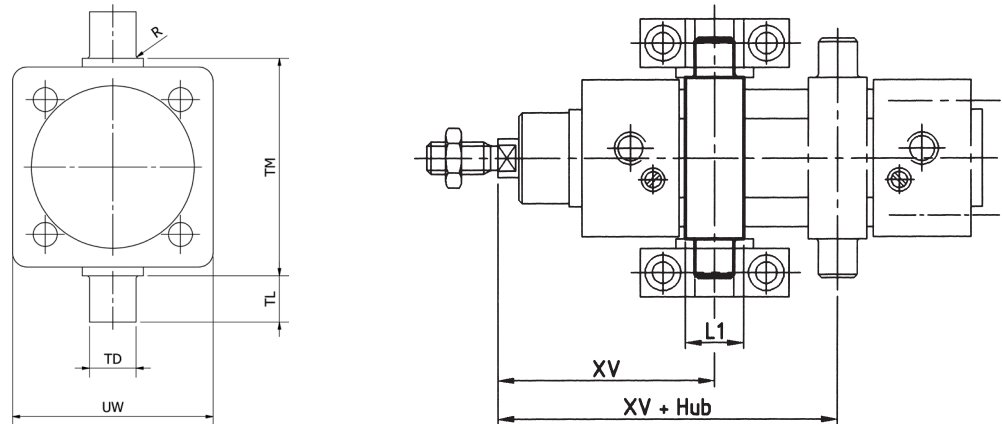

Bei der geschraubten Ausführung (Typ A) ist das Maß XV anzugeben.

Typ	Kolben-Ø	L1	TD _{e9}	TL _{h14}	TM _{h14}	UW	R _{max.}	XV	Gewicht kg
MT4 A-125 / MT4 B-125	125mm	32	25	25	160	155	2,0	143	2,6
MT4 A-160 / MT4 B-160	160mm	40	32	32	200	190	2,5	164	4,3
MT4 A-200 / MT4 B-200	200mm	40	32	32	250	240	2,5	181	7,5
MT4 A-250 / –	250mm	50	40	40	320	296	3,2	196	13,0
MT4 A-320 / –	320mm	70	50	50	400	400	3,2	218	30,0

MT4 Ø 125 ist auch für Profilrohrzylinder erhältlich.

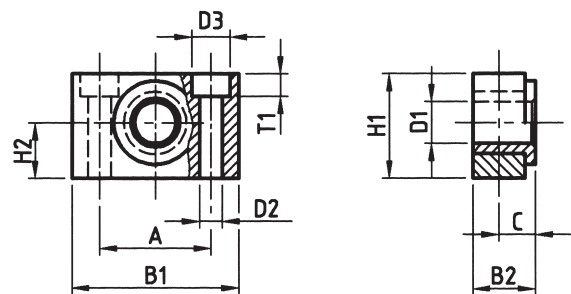Anbauteil Lager für Schwenkzapfenbefestigung – AT4

Typ	Kolben-Ø	A ^{+0,2} _{-0,2}	B1	B2	C	D1 ^{F7}	D2 ^{H13}	D3 ^{H13}	H1	H2 ^{+0,1} _{-0,1}	T1 ^{+0,5} _{-0,5}	Gewicht kg
AT4-125	125mm	50	75	28,2	16,0	25	14	20	50	25	13	0,45
AT4-160	160mm	60	92	40,0	22,5	32	18	26	60	30	17	0,85
AT4-200	200mm	60	92	40,0	22,5	32	18	26	60	30	17	0,85
AT4-250	250mm	90	140	56,0	31,0	40	22	33	70	35	20	2,75

Lieferumfang 1 Paar

